

Stiftleisten Pin Header

STIFTLEISTEN RM 2,54 MM GEWINKELT EINREIHIG, NYLON 6T
PIN HEADER PITCH 2.54 MM R/A TYPE SINGLE ROW, NYLON 6T



Revision: 03

SPECIFICATION

Current Rate: 3 AMP
Insulation Resistance: 5000 MΩ Min.
Contact Resistance: 10 mΩ Max.
Dielectric Voltage: 1000 V AC for one minute
Operation Temperature: -40 °C to +105 °C

MATERIAL

Insulator: Nylon 6T black, UL94V-0
Contacts: Brass



HANDLING

Processing: Wave soldering
Packing: Bag

TOLERANCE

.X ±0.35
.XX ±0.25

RoHS
COMPLIANT

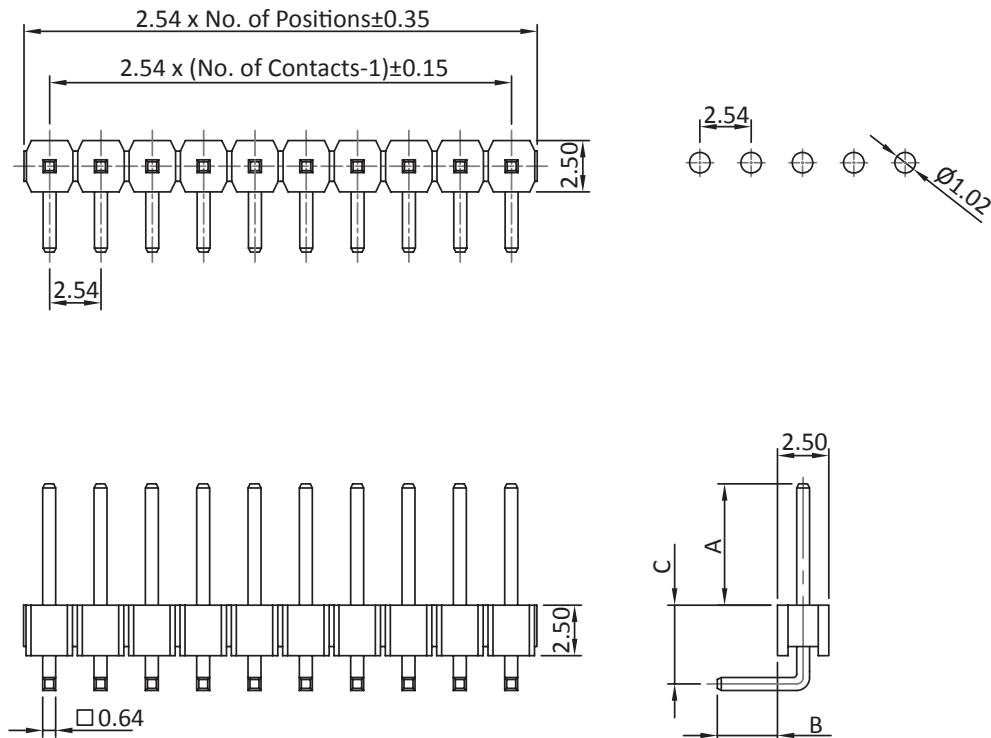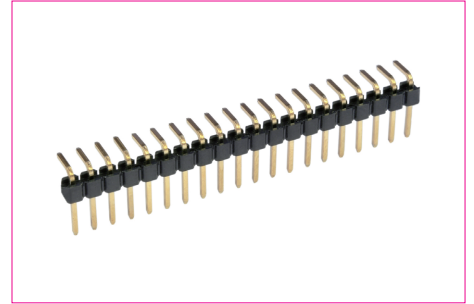

Order Information

Series	No. of Contacts	Contact Plating	Length
SL25WS	##	#	#
Pin Header 2.54mm Right Angle Type Plastic Height 2.5mm Single Row, Nylon 6T	2 : 1 x 2	G : Gold Flash *	A : A=6.0 B=3.0 C=3.9
	3 : 1 x 3	S : Selective	B : A=4.2 B=2.4 C=3.9
	4 : 1 x 4	B : 10μ" Gold	C : A=6.0 B=3.0 C=4.0 *
	:	C : 20μ" Gold	D : A=5.84 B=2.54 C=4.06
	50 : 1 x 50	T : Tin plated	E : A=10.0 B=3.2 C=8.0
			F : A=5.8 B=3.0 C=4.3
		G : A=3.5 B=3.0 C=3.7	
		H : A=3.5 B=3.0 C=3.9	
		X : special dimension also available	

* = Standard