

Stiftleisten Pin Header

STIFTELEISTEN RM 2,54 MM GEWINKELT ZWEIREIHIG, NYLON 6T
PIN HEADER PITCH 2.54 MM R/A TYPE DOUBLE ROW, NYLON 6T



Revision: 02

SPECIFICATION

Current Rate: 3 AMP
Insulation Resistance: 1000 MΩ Min.
Contact Resistance: 20 mΩ Max.
Dielectric Voltage: 1000 V AC for one minute
Operation Temperature: -40 °C to +105 °C

MATERIAL





Insulator: Nylon 6T black, UL94V-0
Contacts: Brass

HANDLING

Processing: Wave soldering
Packing: Bag

TOLERANCE

.X ±0.35
.XX ±0.25

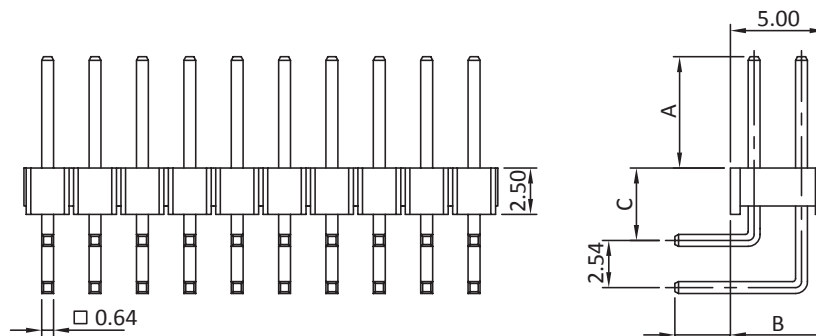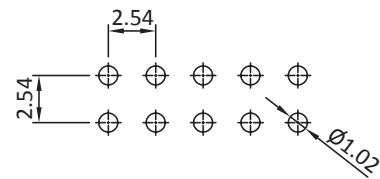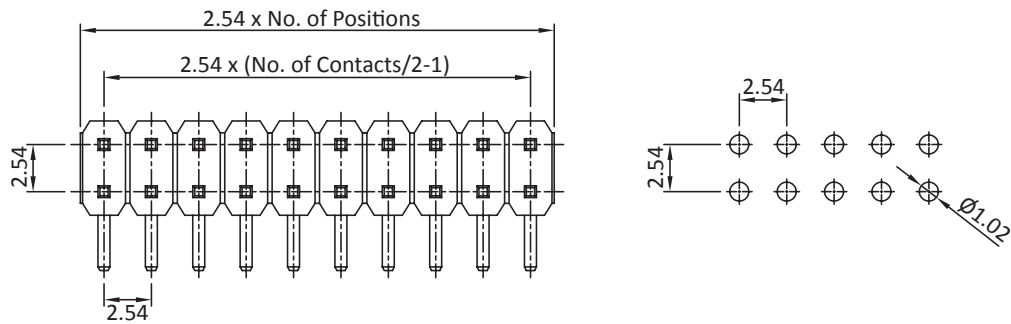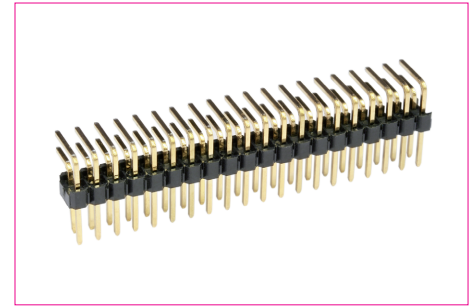

Order Information

Series	No. of Contacts	Contact Plating	Length
SL25WD	##	#	#
Pin Header 2.54mm Right Angle Type Plastic Height 2.5mm Double Row, Nylon 6T	4 : 2 x 2 6 : 2 x 3 8 : 2 x 4 : 100 : 2 x 50	G : Gold Flash * S : Selective B : 10µ" Gold C : 20µ" Gold T : Tin plated	A : A=6.0 B=3.0 C=3.9 * B : A=5.84 B=2.54 C=4.06 F : A=3.0 B=3.0 C=4.3 X : special dimension also available

* = Standard